



actual size

Oscillator JT32C · TCXO

- TCXO with HCMOS output, 3.2 x 2.5 mm
- excellent phase noise
- operating temperature range -40 °C ~ +85 °C
- ceramic/metal package



RoHS compliant



Pb free



REACH
compliant



Conflict
mineral free

GENERAL DATA

TYPE		JT32C
frequency range		10.0 ~ 54.0 MHz
frequency stability	at +25°C	± 2.0 ppm (incl. 2x reflow)
	temperature	± 2.5 ppm (others on request)
	aging first year	± 1.0 ppm
	supply voltage	± 0.2 ppm (at V _{DC} ± 5%)
	load change	± 0.2 ppm
current consumption		see table 1
supply voltage V _{DC}		2.5 V / 2.8 V / 3.3 V (± 5%)
temperature	operating	-30 °C ~ +75 °C / -40 °C ~ +85 °C
	storage	-40 °C ~ +105 °C
output	rise & fall time	5.0 ns max.
	load max.	15 pF
	current max.	4.0 mA
	low level max.	0.1 x V _{DC}
	high level min.	0.9 x V _{DC}
harmonics distortion max.		-5.0 dBc
symmetry at 0.5 x V _{DC}		45% ~ 55% max.
start-up time max.		3 ms
standby current max.		10 µA
output enable time max.		3 ms
output disable time max.		250 ns
phase jitter 12 kHz ~ 20 MHz		< 0.35 ps RMS max. / 0.2 ps RMS typ.

TABLE 1: CURRENT CONSUMPTION MAX.

	10 ~ 20 MHz	~ 30 MHz	~ 40 MHz	~ 54 MHz
2.5 V	3.7 mA	4.2 mA	4.6 mA	5.5 mA
2.8 V	4.1 mA	4.7 mA	5.2 mA	6.0 mA
3.3 V	4.8 mA	5.5 mA	6.0 mA	7.0 mA

ENABLE / DISABLE FUNCTION


PIN #1 (E/D CONTROL)	PIN #3 (OUTPUT)
open	active
high "1" (V _{IH} ≥ 0.7 V _{DC})	active
low "0" (V _{IL} ≤ 0.3 V _{DC})	high impedance

stop function:
 - oscillator stops
 - output high impedance


NOTE

4 user pins (e/d, GND, output, V_{DC})
 leave the other pins unconnected!


DIMENSIONS




top view



side view



bottom view



pad layout

TCXO
 JT32C
 # 1: e/d
 # 2: GND
 # 3: output
 # 4: V_{DC}

pin connection

in mm

ORDER INFORMATION

0

Oscillator

frequency

10.0 ~ 54.0 MHz

type

JT32C = TCXO

frequency stability
code

A = ±2.5 ppm

operating temp.
code

G = -30 °C ~ +75 °C
 K = -40 °C ~ +85 °C


supply voltage

2.5 = 2.5 V
 2.8 = 2.8 V
 3.3 = 3.3 V

Example: 0 40.0-JT32C-A-K-3.3-LF (Suffix LF = RoHS compliant / Pb free)



Oscillator JT32C · TCXO with HCMOS output

TAPING SPECIFICATION

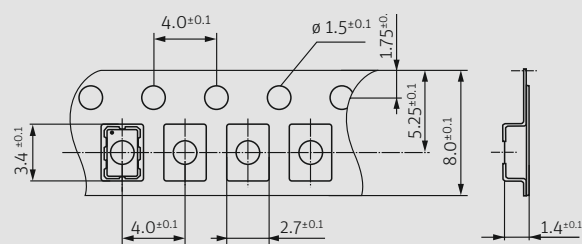


500 pcs per reel

Feeding →



in mm

REFLOW SOLDERING PROFILE

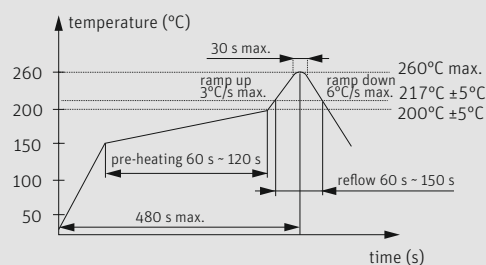

note: parts are also suitable for soldering systems with lead (Pb) content

MARKING

frequency

company code / date code

date code: A ~ M: Jan. - Dec.

2: 2022 3: 2023 4: 2024 5: 2025 6: 2026 7: 2027

Jan.	Febr.	Mar.	Apr.	May	June
A	B	C	D	E	F
July	Aug.	Sept.	Oct.	Nov.	Dec.
G	H	J	K	L	M

PACKAGING NOTE

- standard packing unit is 500 pieces per reel
- non-multiple packing units are only supplied taped / bulk